




FRONT VIEW




SIDE VIEW

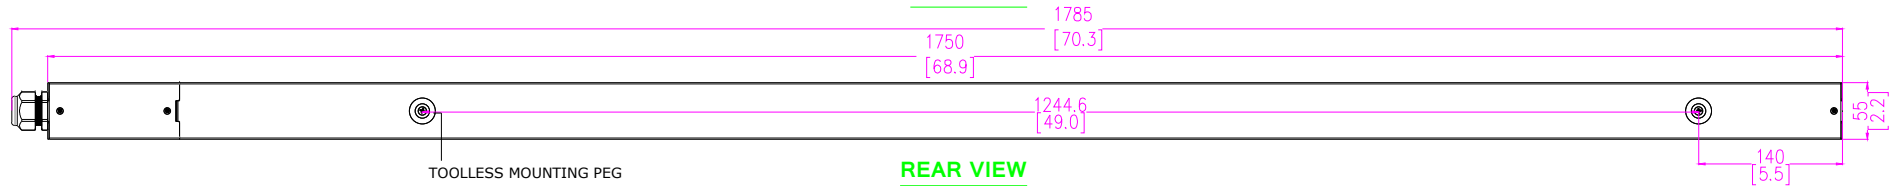

REAR VIEW

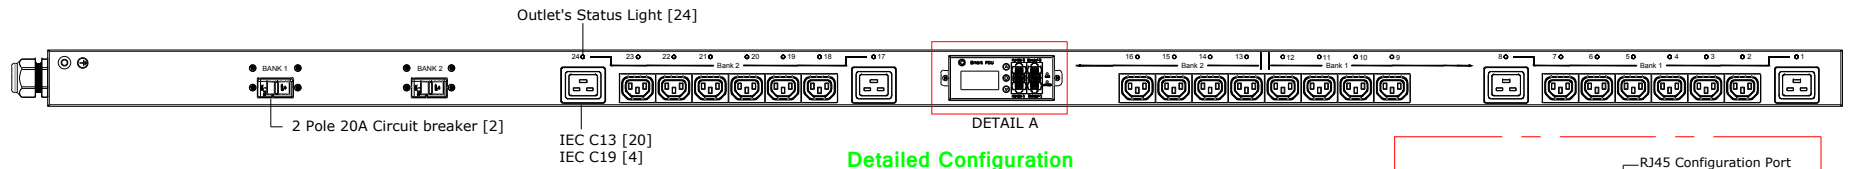


Detailed Configuration

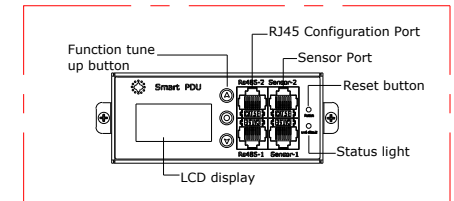

DETAIL A 2 : 1

INPUT CONNECTION:



NEMA L6-30P

Config Table		
Model#	Power Cord Length	Input Connection
AP3002-2004	3x10AWG,3.6M(12ft)	NEMA L6-30P

PDU Series : Metered BANK & Switched per outlet
 Input : 200-240V AC ,24A ,1Ph, 50/60Hz.
 Outlet : IEC C13 [20] IEC C19 [4]
 CB : 20A-2P [2]
 Bank : 2
 Case Material: Galvanized steel sheet
 Case: Black

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Drawn by: Darren Approved by: Roger	Description: Metered BANK&Switched per outlet PDU 208V,24A,1Ph,50/60 Hz	Drawing No. AP3002-2004
		Unit: mm Sheet: 1 OF 1
Scale: 1:1	Third Angle Projection A4	Unit: mm

Toleranss/Tolerance
 ISD
 2768-M

>0.5=3 ±0.1

>3=6 ±0.1

>6=30 ±0.2

>30=120 ±0.3

>120=400 ±0.5

>400=1000 ±0.8